

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	


SERIES SPECIFICATIONS

UNIVERSAL BUSHING

- Absorb vibration and cushion and insulate cables, tubing, hoses or shafts.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Fingertip pressure snap-locks the bushing into its mounting hole



LINE DRAWING

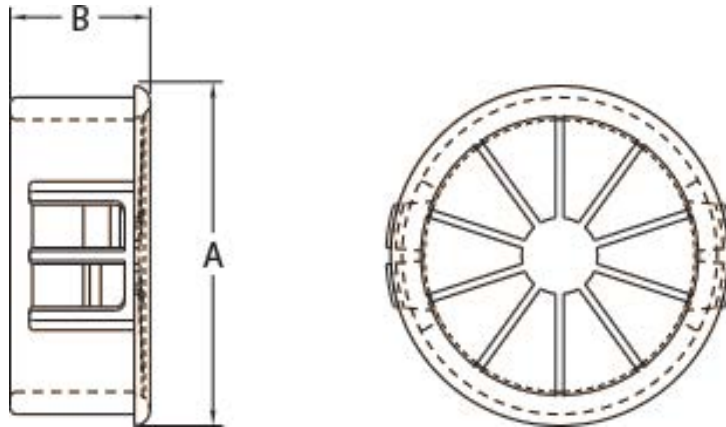

CONSTRUCTION

Body Material
Nylon

Color
Black

Flamability Rating
94V-2

Temperature Range
-4°F (-18°C) to 221°F (105°C)

CERTIFICATIONS/WARRANTY

Listing
UL Listed

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Catalog Number	Trade Size	A Dim.	B Dim.	Max. Inner Dia.	IMS Code
WI BUSHING 1/2"	1/2"	0.60"	0.39"	0.31"	0279-9927
WI BUSHING 3/4"	3/4"	0.84"	0.39"	0.50"	0279-9930

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION