


MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

SERIES SPECIFICATIONS

Centaurs LSN-I series are used wherever a liquid tight application is needed when fastening threaded conduit to an unthreaded opening in a box or enclosure.



LINE DRAWING

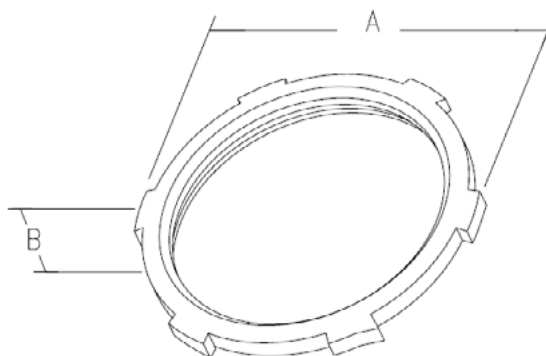

CONSTRUCTION

Material
Zinc Plated-Steel

Color
Galvanized

CERTIFICATIONS/WARRANTY

Listing
UL Listed

Location Rating:
Suitable for Dry locations

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

MODEL :		TYPE
PROJECT :		
PREPARED BY :	DATE :	

ORDERING INFORMATION

Catalog Number	Trade Size.	A IN.	B IN	IMS Code
WI LNS-100-I	1"	1.73	0.27	0293-7609
WI LNS-125-I	1 1/4"	2.08	0.27	0293-7612
WI LNS-150-I	1 1/2"	2.40	0.30	0293-7615
WI LNS-200-I	2"	2.91	0.30	0293-7618
WI LNS-250-I	2 1/2"	3.46	0.33	0293-7621
WI LNS-300-I	3"	4.14	0.33	0293-7624
WI LNS-350-I	3 1/2"	4.69	0.33	0293-7627
WI LNS-400-I	4"	5.25	0.34	0293-7630
WI LNS-50-I	1/2"	1.14	0.23	0293-7633
WI LNS-75-I	3/4"	1.39	0.23	0293-7636

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION