


CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL : BCU025EG

SERIES SPECIFICATIONS

Malleable Iron Universal Beam Clamp



LINE DRAWING

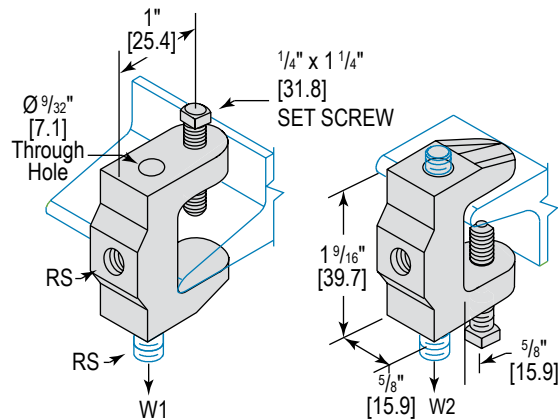

CONSTRUCTION

Material
Carbon Steel

Finish
Electro-Galvanized

Galvanization Material
Zinc

Galvanization Thickness
0.2mil - 0.5 mil

* The threaded hole on the back side of the clamp is not load rated.
Maximum flange thickness of 5/8

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION

CONTRACTOR	
PROJECT	DATE
PREPARED BY	MODEL : BCU025EG

ORDERING INFORMATION

CatalogNumber	Weight	Rod Size	Max Load 1 Lbs.	Max Load 2 Lbs.	IMS Code
BCU025EG	0.24	1/4"-20	100	4"	0305-7723

NOTES

Carbon Steel – ASTM A1011-00 SS GR 33 or ASTM A1011-00CS Type B

EG – Electro-Galvanized. Electroplating deposits zinc on the surface of the steel by electrolysis from a bath of zinc salts. Recommended for relatively dry indoor use. This is the standard coating for most Phoenix products. Thickness of applied zinc is between 0.2 mils to 0.5 mils [5.1 µm to 12.7 µm]. Coatings on Phoenix EG products meet ASTM B633 SC1 Type III.

APPLICATION AND PERFORMANCE SPECIFICATION INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTIFICATION