



CENTAUR STEEL

635 NW Enterprise Dr. Port St Lucie, FL 34986

tel: (772) 344-9436 or on the web @ www.centaursteel.com

SPECIFICATION & FEATURES

Catalog Number
Notes
Job/Title

CM-4RB



4" OCTAGON (40) WELDED BOXES & EXTENSION RINGS 1-1/2" DEEP

DESCRIPTION:

Centaur Steel's 4" Octagon (40) Boxes and Extension Rings are used in the installation of light fixtures and other electrical devices in walls and ceilings. They are constructed from 16 gauge galvanized steel. The multiple knockouts allow for easy installation. Our selection includes side brackets, bar hangers, and sliding brackets to suit specific needs.

CERTIFICATION:

UL file E227970, conforms to UL514A. acceptable for use in 2-hour fire rated walls.

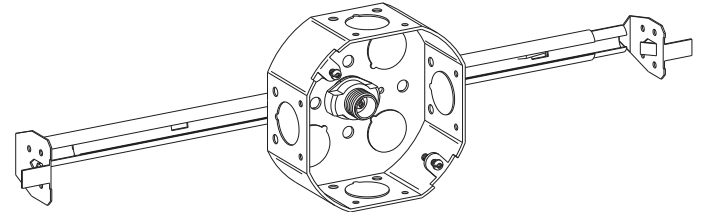

FEATURES

Knockout:

50: 1/2" K.O.

MKO: Moon K.O. (1/2" and 3/4" K.O.)

Bracket:

FB: (L: 7-1/4", W: 3/4") Offset (1/2") Mounts on flat side of stud or joist

LB: (L: 2-3/8", W: 2-23/32") With spurs, slotted holes for toe-nailing.

Bar Hanger:

BHA: Adjustable Bar Hanger allows installation of box anywhere along length of stud. Cables with ground

Mfg. Process:

WELDED

DIMENSIONS

Diameter: 4"

Depth: 1-1/2"

Cu.In.: 15.5

CONFIGURATION DATA

Catalog No.	Bracket & Setback	Knockouts		Std. Pkg.
		Sides	Bottom	
CM-4RB-50	-	(4)-1/2"	(5)-1/2"	50
CM-4RB-MKO	-	(2)-1/2", (2)-MKO	(3)-1/2", (2)-3/4"	50
CM-4RB-50-FB	FB, 1/2"	(3)-1/2"	(5)-1/2"	50
CM-4RB-MKO-FB	FB, 1/2"	(1)-1/2", (2)-MKO	(3)-1/2", (2)-3/4"	50
CM-4RB-50-LB	LB, Flush	(4)-1/2"	(5)-1/2"	50
CM-4RB-50-BHA	BHA, 14-1/2" to 22-1/2"	(4)-1/2"	(4)-1/2"	25
CM-4RB-50-EXT	-	(4)-1/2"	-	50
CM-4RB-MKO-EXT	-	(2)-1/2", (2)-MKO	-	50

*CM-4RB-50-BHA includes 3/8" - 18 NPS trade sized stud to accommodate fixture stem

